


iD INSPIRATION CLICK




Rustic Oak - Stone Brown, Dark Grey, Medium Grey, Light Grey



Rustic Oak

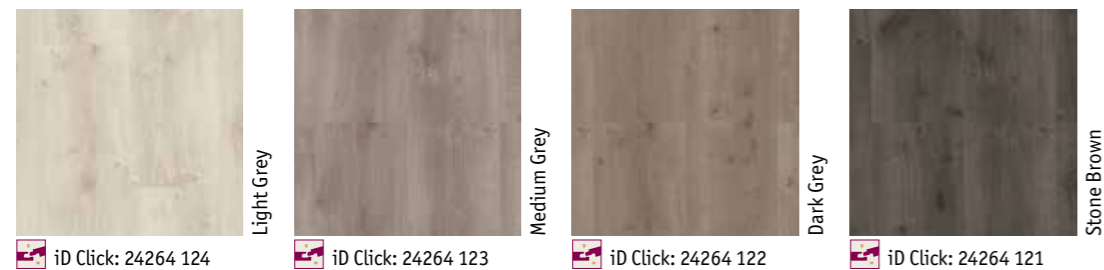

Contemporary Oak

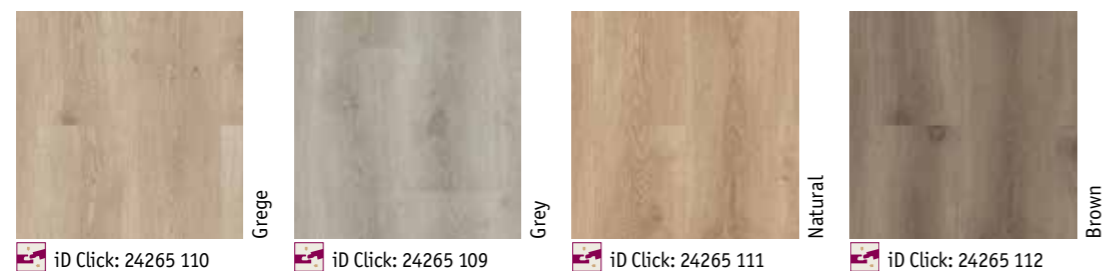

TECHNICAL DATA	STANDARDS	iD Inspiration Click*
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product
Classification	EN ISO 10874 (EN 685) commercial industrial	Classes: 33 42
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.5mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm
Total weight	EN ISO 23997 (EN 430)	8 000g/m ²
PU treatment	—	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	$\Delta L_w = 3dB$ 19 dB with Tarkomfort Premium
Acoustic improvement	NF S31-074	Class C ($L_{n,e,w} < 85dB$)
Residual indentation	Average measured value	0.09mm
	EN ISO 24343-1 (EN 433) requirement	$\leq 0.10mm$
Reaction to fire	EN 13501-1	B _n -s1 loose laid over concrete substrate
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing $\mu \geq 0,30$
Dimensional stability	EN ISO 23999 (EN 434)	$\leq 0.10\%$
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	$\leq 2.00mm$
Electrostatic properties	EN 1081 EN 1815	< 2 kV on concrete > 10 ⁹ Ohm
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

*Also available in iD Inspiration glue-down.

iD INSPIRATION CLICK Woods

Main Product Features

- Ideal for the renovation of commercial areas 
- Fast, easy and economical
- Highly resistant product with 0.55mm transparent wear-layer
- Perfect matching LVT skirtings available in 20 colours


Surface Treatment



Sustainability Tag



Logistics Information

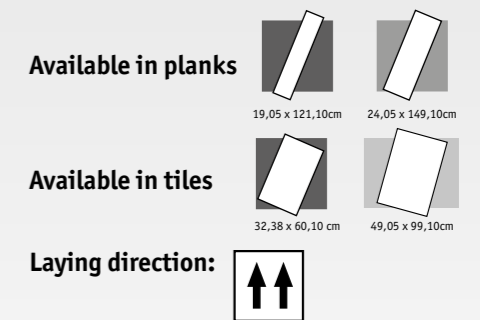

General Information



iD INSPIRATION CLICK



Patina Ash - Brown, Grey


ELM



Patina Ash



Terrazzo

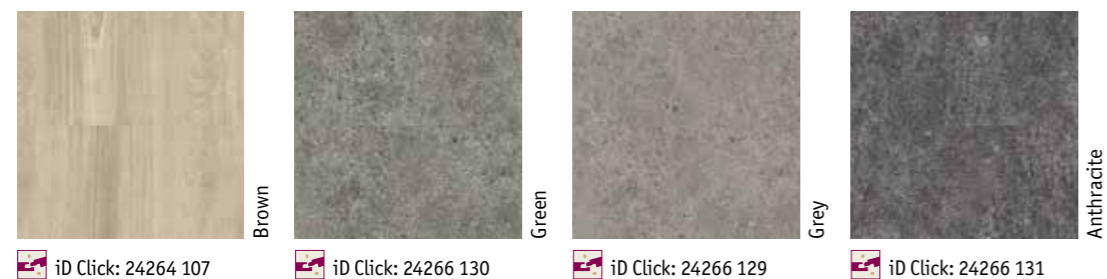

Oxide



TECHNICAL DATA	STANDARDS	iD Inspiration Click*
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product
Classification	EN ISO 10874 (EN 685) commercial industrial	Classes: 33 42
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.5mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm
Total weight	EN ISO 23997 (EN 430)	8 000g/m ²
PU treatment	—	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Impact sound reduction	EN ISO 717/2	$\Delta L_w = 3dB$ 19 dB with Tarkomfort Premium
Acoustic improvement	NF S31-074	Class C ($L_{n,e,w} < 85dB$)
Residual indentation	Average measured value	0.09mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _n -s1 loose laid over concrete substrate
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing $\mu \geq 0,30$
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1081	< 2 kV on concrete
	EN 1815	> 10 ⁹ Ohm
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017). For more detailed technical information, please contact Tarkett.

*Also available in iD Inspiration glue-down.

iD INSPIRATION CLICK Woods & Material effects

Main Product Features

- Ideal for the renovation of commercial areas
- Fast, easy and economical
- Highly resistant product with 0.55mm transparent wear-layer
- Perfect matching LVT skirtings available in 20 colours




Surface Treatment



Sustainability Tag



Logistics Information

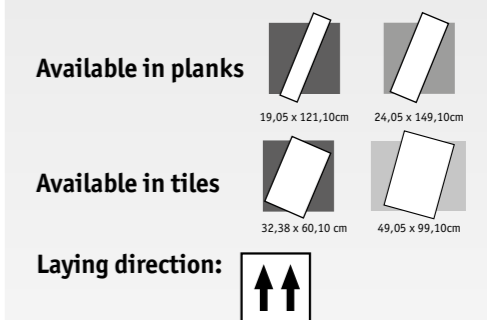

General Information

