



The game changer

The first impression of a space is to a great extent defined by thoughtfully designed interior. Texture and colour of the floor gives basic tone to the space, which is upgraded with the other elements of interior design. LVT floor coverings changed the game rules completely, when it comes to floor design.

Modular solution

This LVT collection opens numerous possibilities of combining designs, various textures, shapes and colours, thanks to its modularity. Areas in which ModularT 7 is installed can exude simplicity and calmness, or they can be cozy, with lots of details and strong personal touch of people spending their time there.

With four carefully and professionaly chosen designs in 22 colours, inspired by natural materials, ModularT 7 provides possibility to create spaces with different styles. This collection is a good solution for spaces with high traffic, such as hotels, coffee shops, stores, offices, or restaurants. Characteristics like simple maintenance, water resistance, durability and impact sound reduction, make ModularT 7 the right choice from both functional, and aesthetic aspect.

Summary:

ustainable solution	2
onstruction for high performances	Į
esign for excellence Design team Tarkett	6
esign Oak Trend	8
esign Oak Origin	18
esign Oak Street	26
esign Beton	36
lodular solution	52
stallation instructions	58
echnical data	59

2

Sustainable solution

1. Phthalate free

We selected **phthalate** free plasticizers approved for food contact containers, which can also be used for toys intended to be placed in the mouth by children. children.
This way, we offer
our clients more
comfortable, healthy and
people-friendly indoor
spaces, keeping high
performance and design



2. VOC ≤100µg/m³

experience.



3. 100% recyclable





10 layer construction for high performances

Durability: Very resistant and durable floor, intended for commercial areas with high frequency.

Multiple glass fiber and glass grid reinforcement (PATENT PENDING) for great dimensional stability, several times better than most products on market have. Thanks to innovative construction, ModularT is flexible enough and easier for manipulation during installation.






Additional protective layer on floor covering, which keeps dirt away from lower layers of the product, at the same time making cleaning and maintenance of the floor easier.



Water resistant material.



Construction that provides good acoustic insulation, two times better than regular compact LVT.

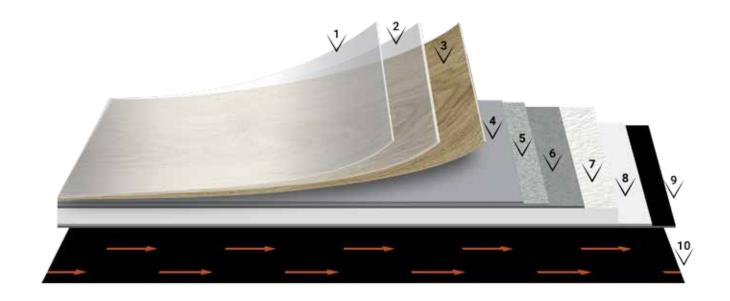

Bevelled edges: realistic look of natural designs






Design for excellence

Collection ModularT has been created after researching latest trends in ceramics and wood floor coverings. Its designs are suitable for modern architecture, and for those who like simplicity and uniqueness, at the same time paying attention to details.

We created this collection led by idea of achieving excellence.

ModularT collection is a selection of modern designs, created with the use of classic materials. Three different kinds of wood, the soul of collection, are timeless classics with natural imperfections, modern colours that create contemporary look of living spaces. Three woods, perfect for any use, from commercial to residential spaces, designed in order to satisfy those who search for classic looks, as well as those who prefer Scandinavian minimalism. The forth design, Beton, was a sophisticated project with carefully selected combinations of colours, compatible with all three wooden designs. Different grey tones in collection are mixed with nuances of brown and beige colour, which all together represent a solution for urban design spaces.


Collection ModularT with its charm and soul, can support our different characters and personalities.

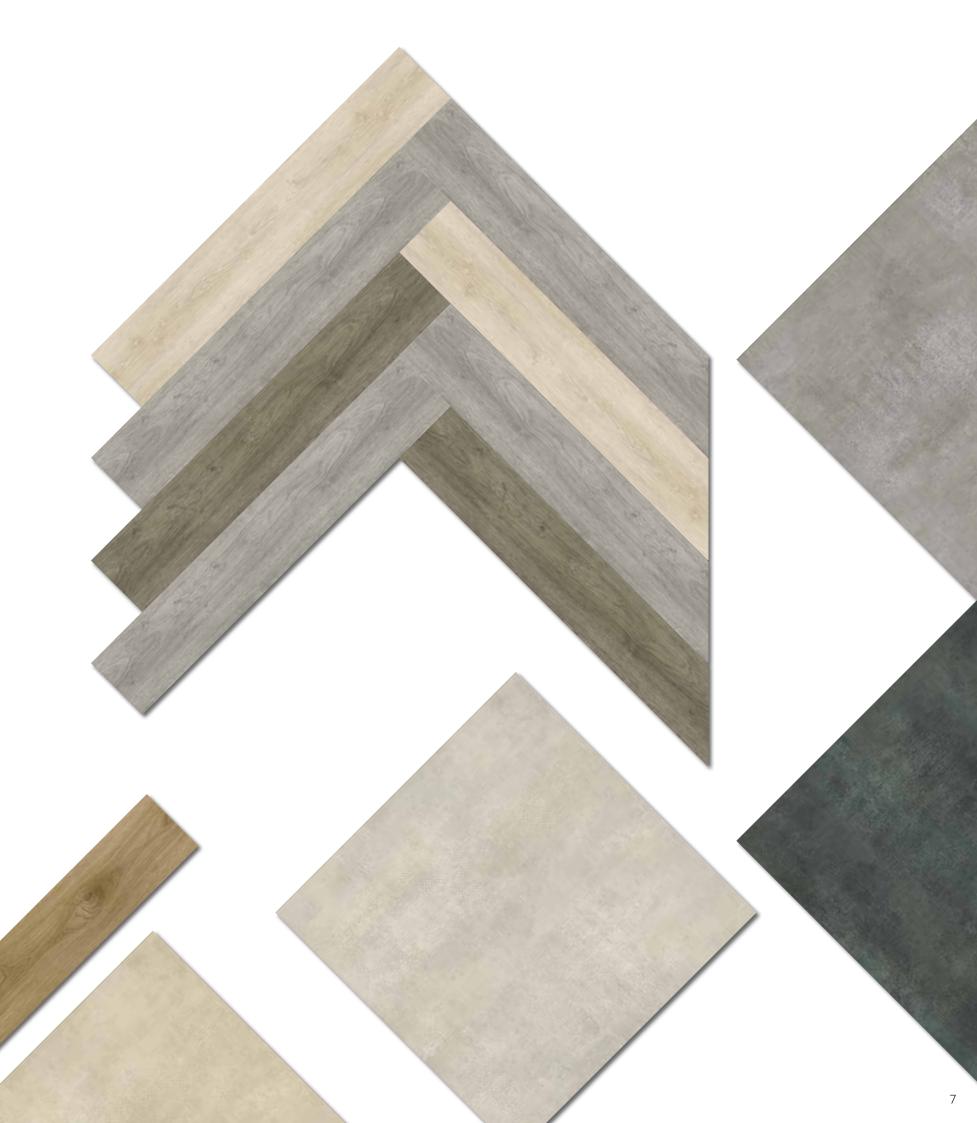

OAK TREND

Authentic, old wood structure, which passed the test of time and became icon of design itself. Remaining trendy through the years, classic wood with enhanced brush effect brings in the spirit of nature. Stories can be told on this floor.


Colour pallette is inspired by Scandinavian style, which, along with its simplicity, expresses warmth, personality and familiarity.

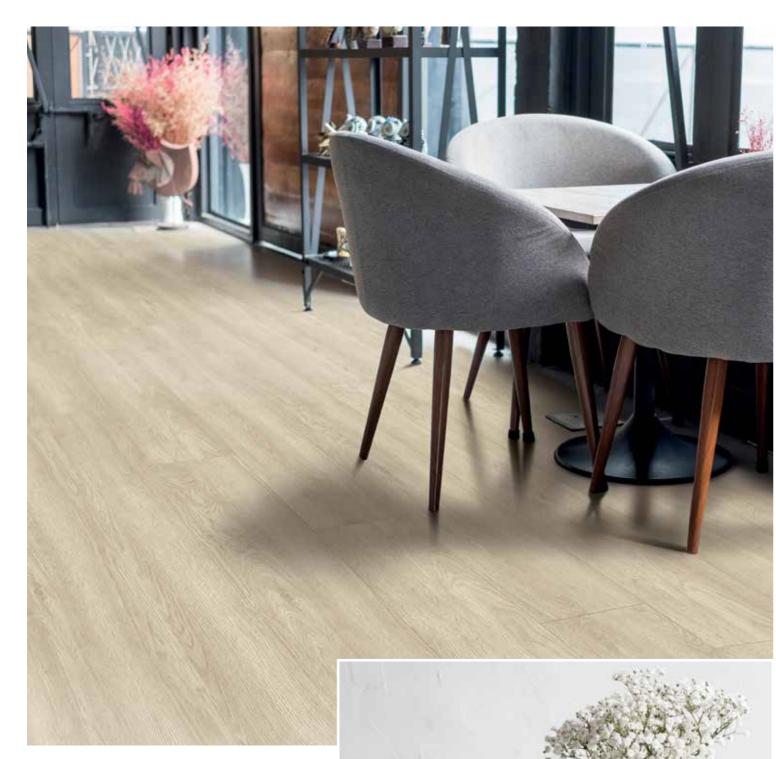


Warm beige nuance with cold ash effect

257021000 / 20x120cm



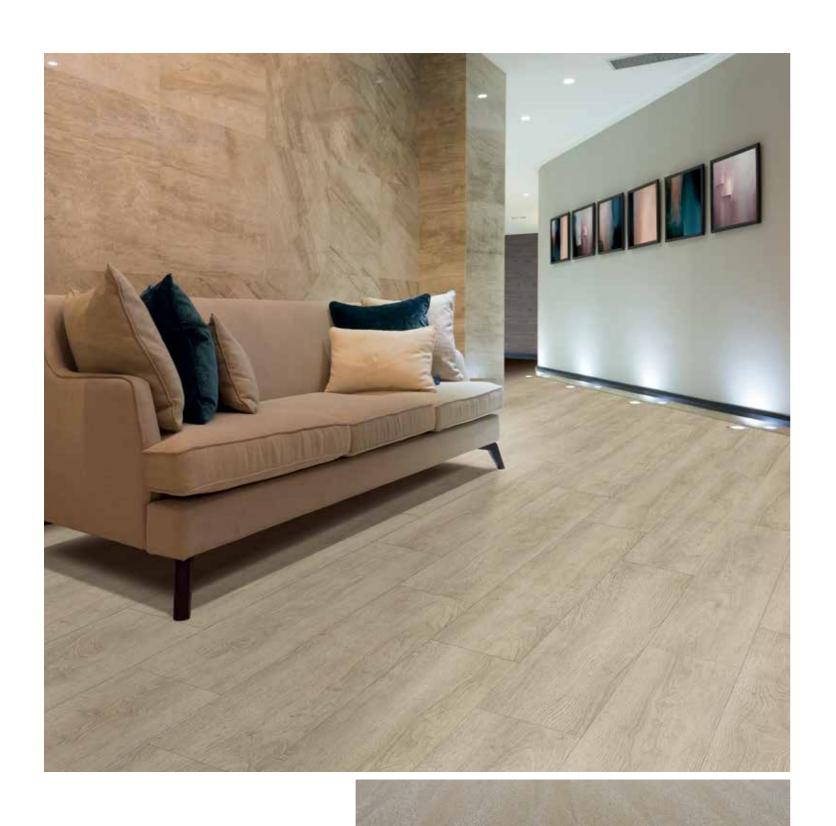




OAK TREND Sand 257021004/20x120cm





OAK TREND Cold Brown 257021003/20x120cm



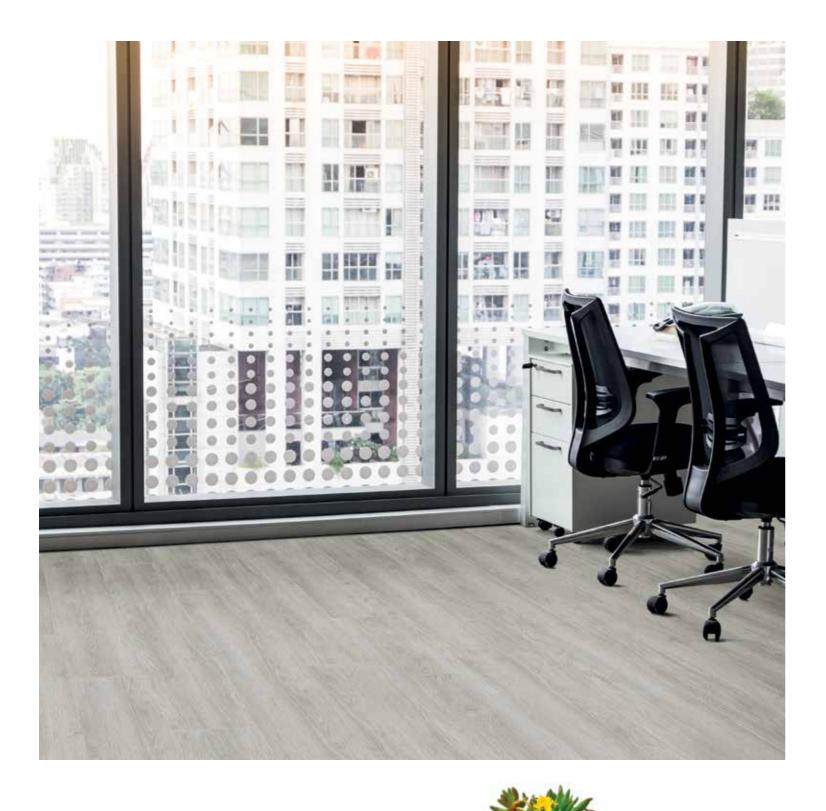


OAK TREND Grey 257021002/20x120cm







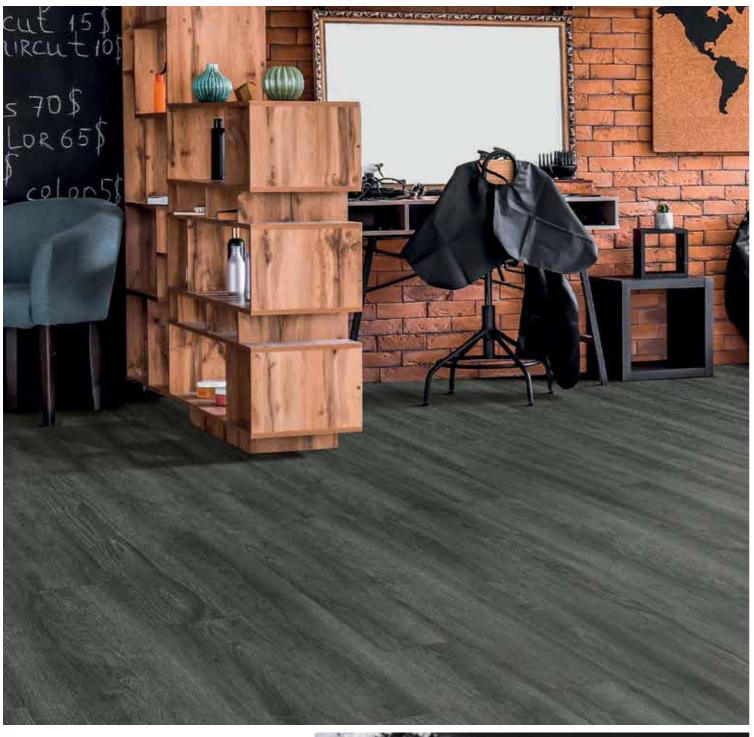



OAK TREND Graphite 257021005 / 20x120cm




Graphite black nuance

OAK ORIGIN

Natural structure of wood exudes freshness and energy, leaving impression of traditional, classic and elegant oak.

Rich and massive structure is in perfect harmony with enhanced shapes and texture. Coloured in calm and flat aspect with darker effects around natural shapes of tree rings, make this design unique. Use of natural colours in this design is very important, since they create atmosphere and impression of natural environment.

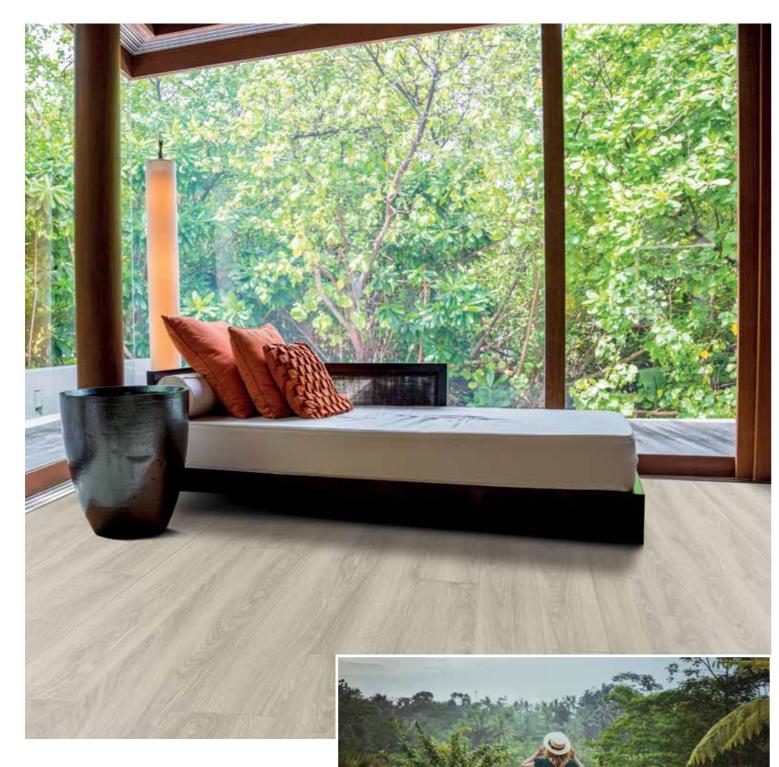


Ice cold beige with grey nuances

257021006 / 20x120cm

OAK ORIGIN Cool Beige



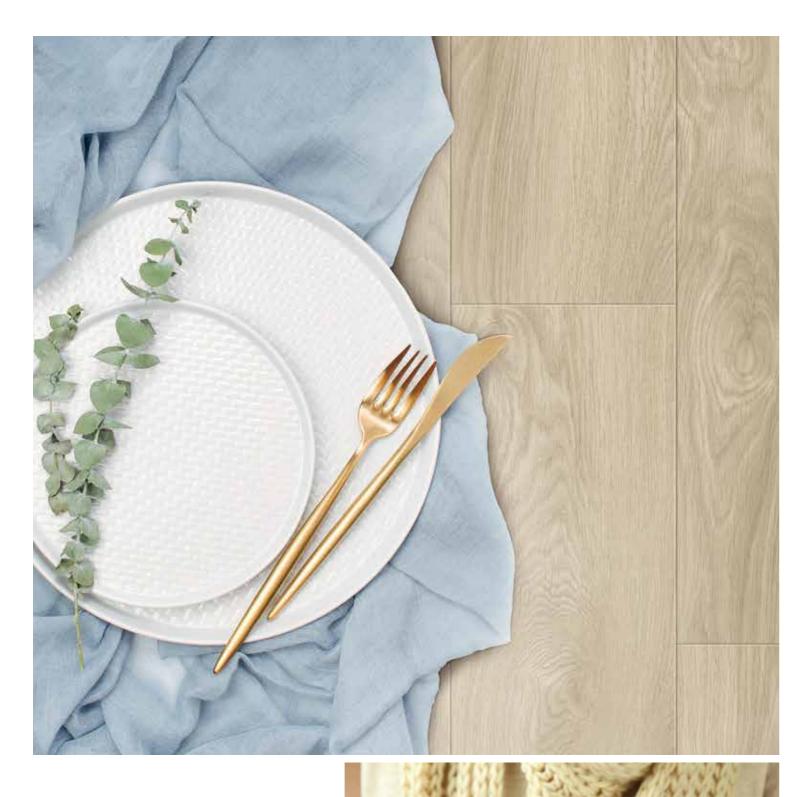

OAK ORIGIN Beige 257021007/20x120cm



Warm powder beige



Classic yellow colour in honey gold tone

OAK ORIGIN Nature 257021009/20x120cm





Natural brown tone in rich wood structure



OAK ORIGIN Light Brown 257021008/20x120cm



OAK STREET

This design brings together traditional and modern, with various possibilities thanks to multicolour nuances.


With its modern appearance, and cheerful colour nuances inside each board, this design gives impressive looks to any space.

Rich selection of colouristic solutions enables complete transformation of this design in different versions.



Light, laminate-like mono white colour is ideal, since it creates the impression of light and clean space 257021014 / 20x120cm



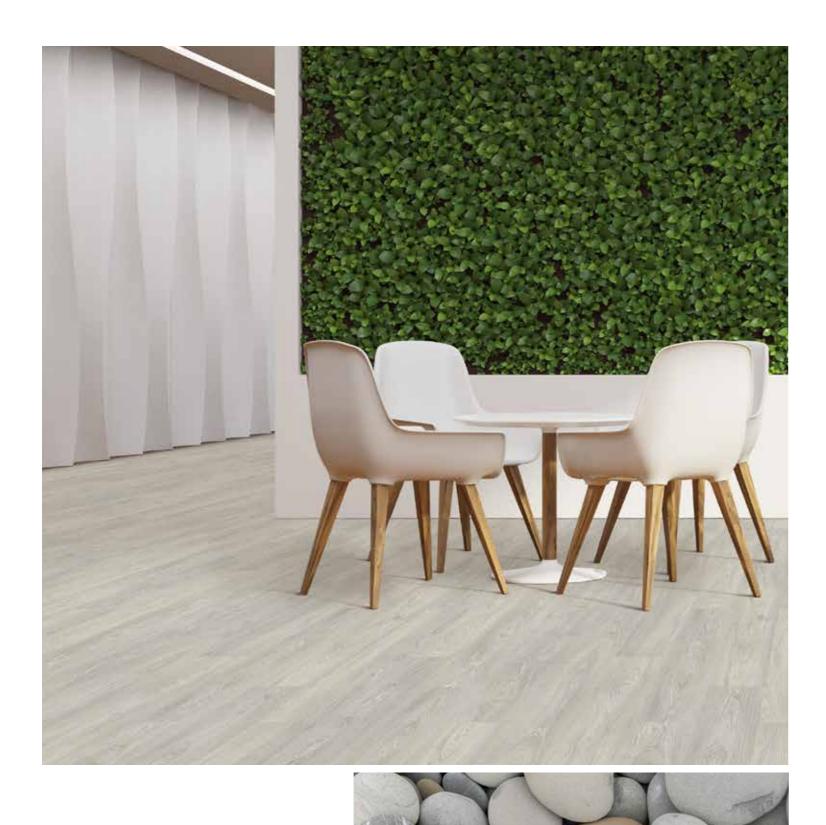

OAK STREET Grey 257021013/20x120cm




Dusty light grey nuance

Beige Stone 257021010/20x120cm OAK STREET



Medium cool pistachio brown

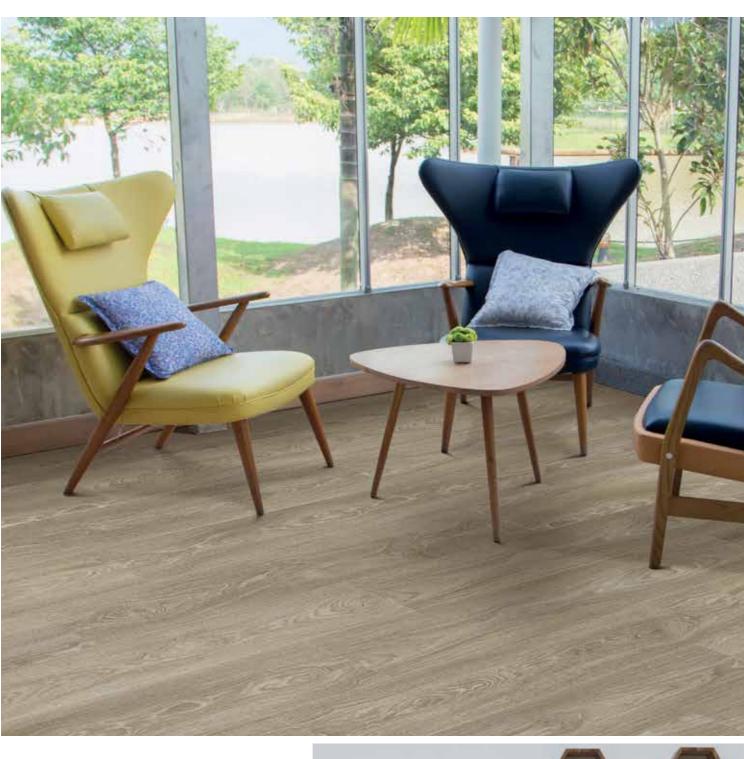




OAK STREET Cold Brown 257021012/20x120cm



Medium nuance of brown colour

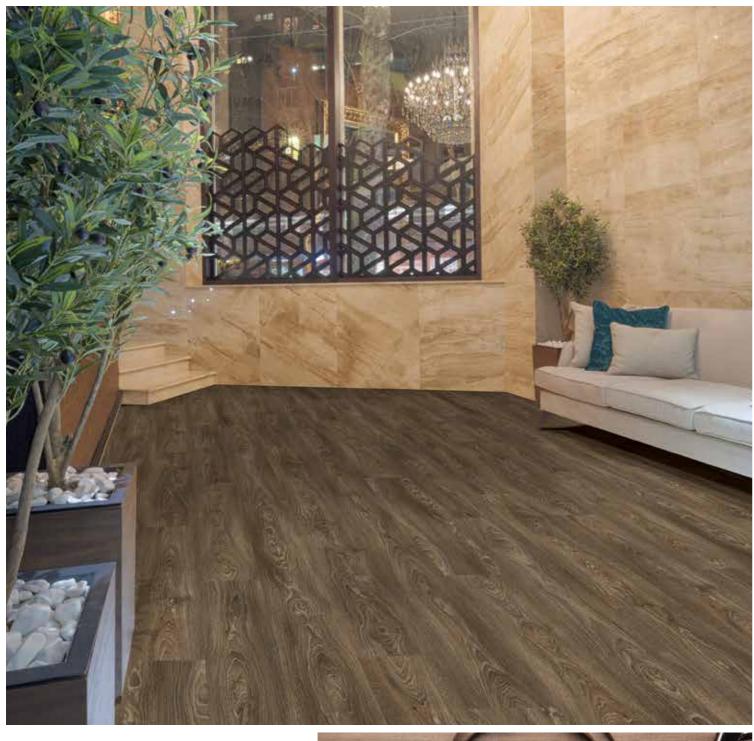




OAK STREET Brown 257021011/20x120cm



Dark chocolate brown


BETON

Concrete design, leaves strong impression with its simplicity. Without excess accents, pure perfection only. Designed and coloured with style, it is ideal for creating minimalist interior design.

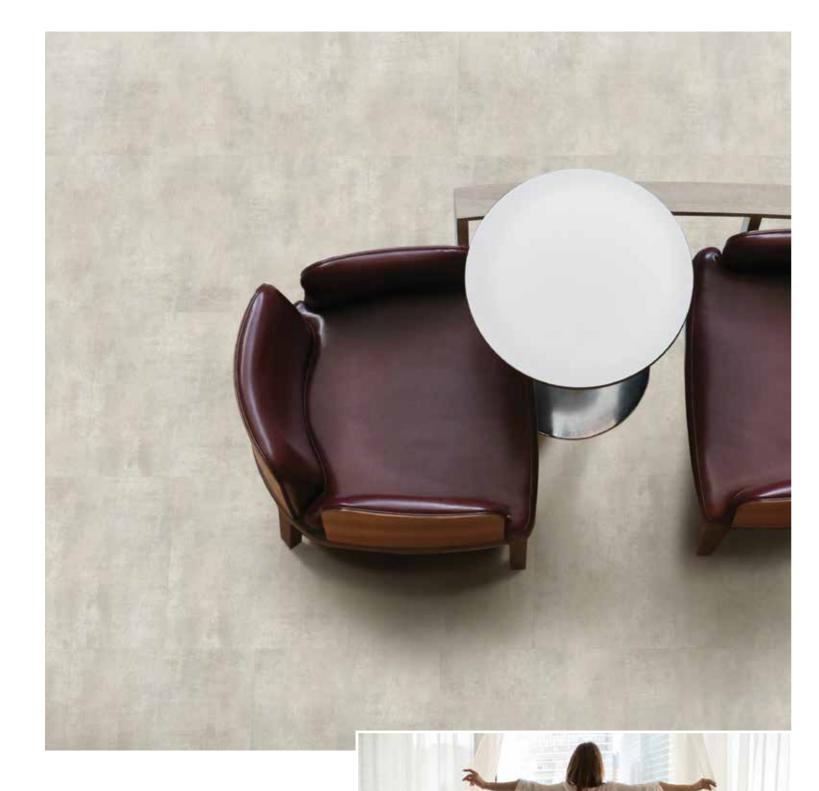

Cool beige nuance, with cold white effect


BETON Cold Beige 257022000 / 60x60cm

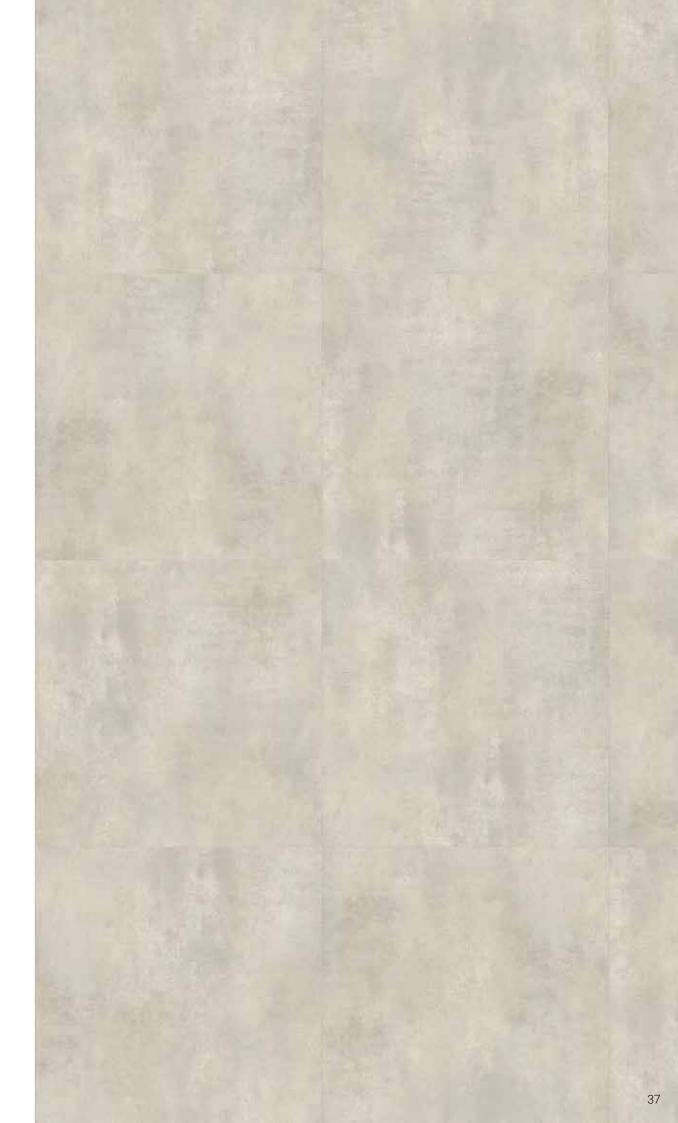






BETON Beige 257022006 / 60x60cm

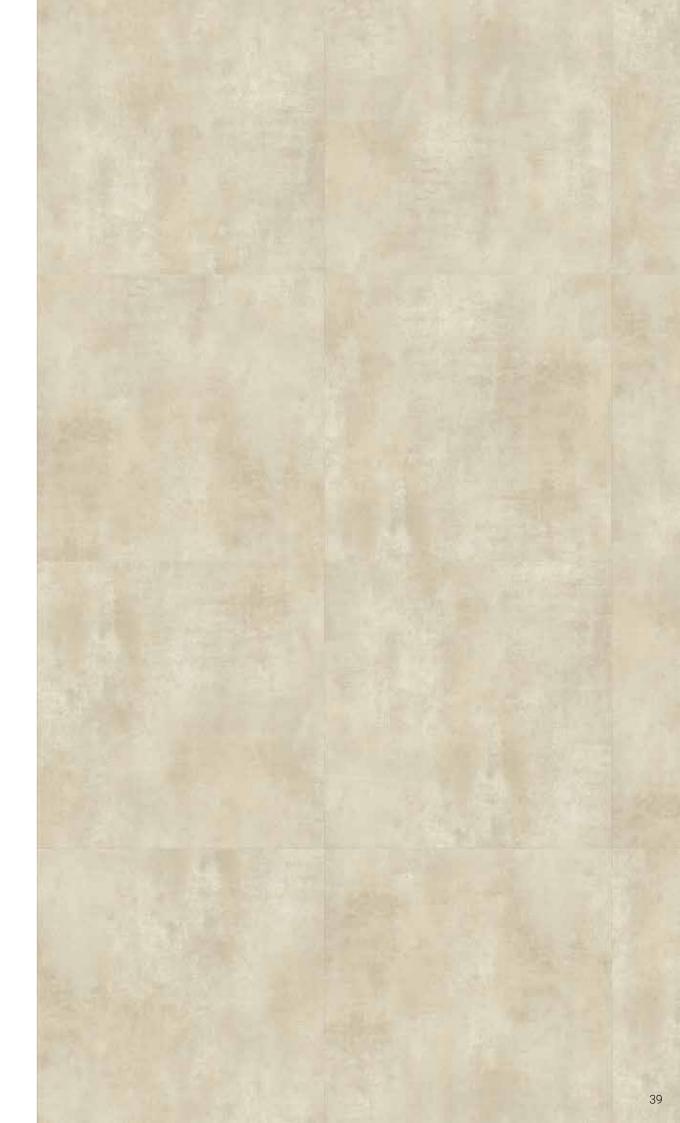

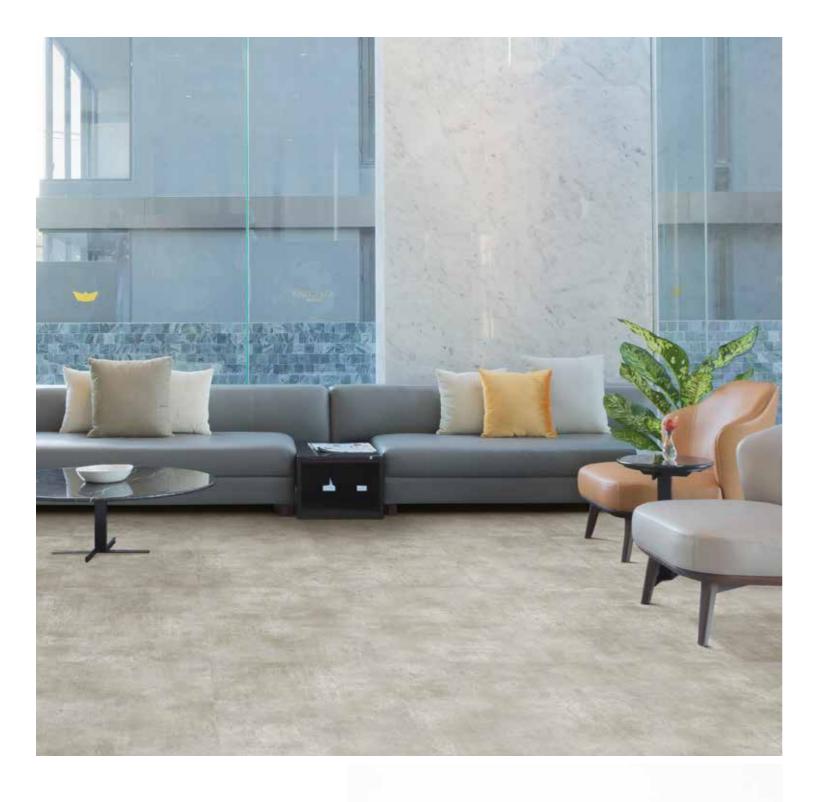

257022003 / 60x60cm **BETON** Original



Light grey concrete colour






BETON Cold Brown 257022002 / 60x60cm



Cold calm brown tones

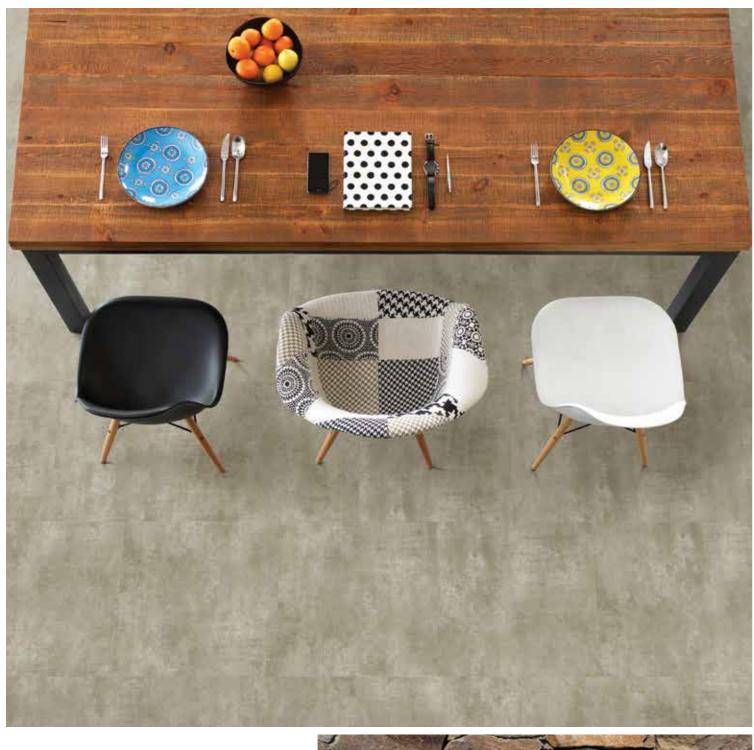




BETON Stone Brown 257022004 / 60x60cm



Light grey with warm brown effect

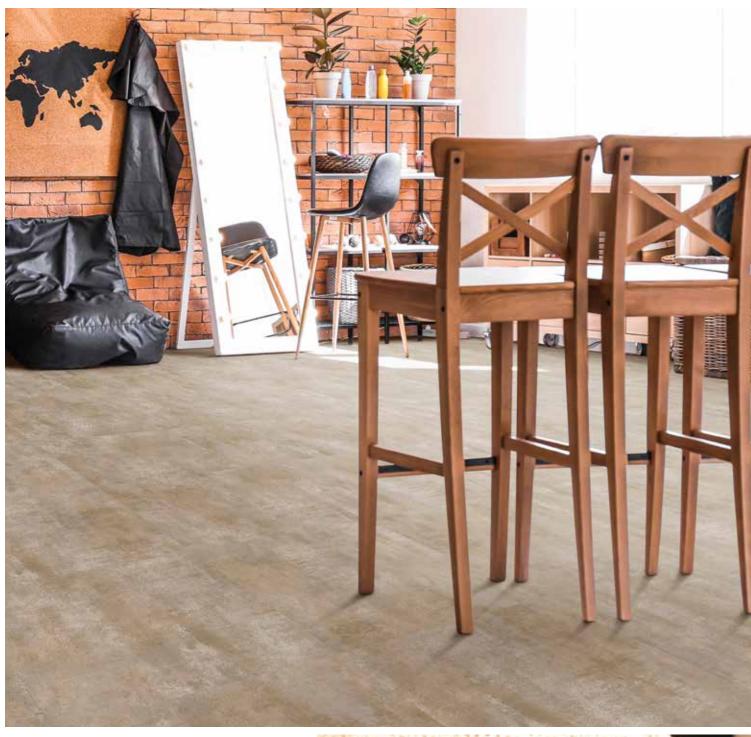


Warm medium brown colour with tones of rust, that can be beautifully combined with neutral tones and white wood



BETON Warm Brown 257022005 / 60x60cm



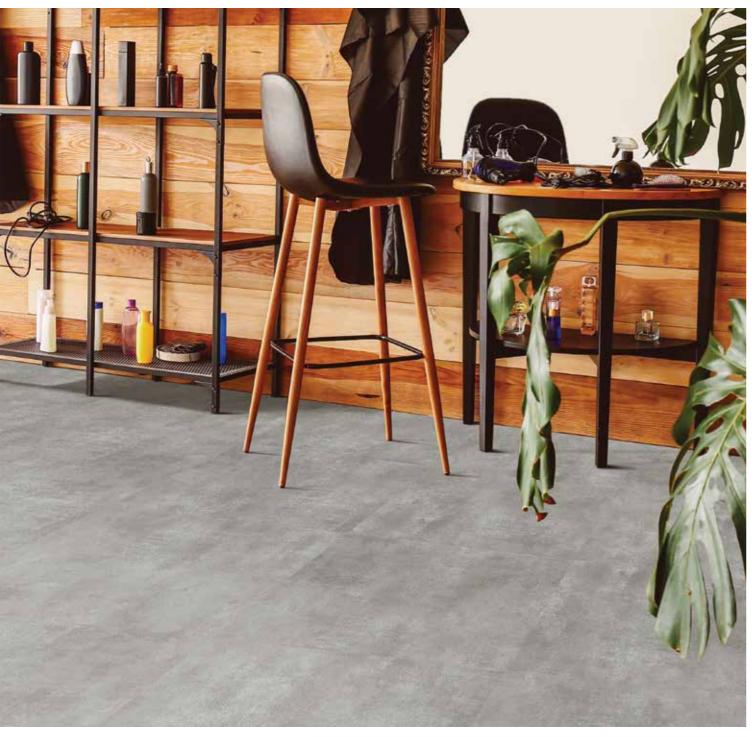




BETON Grey 257022007 / 60x60cm




Classic concrete colour




BETON Dark Grey 257022008/60x60cm

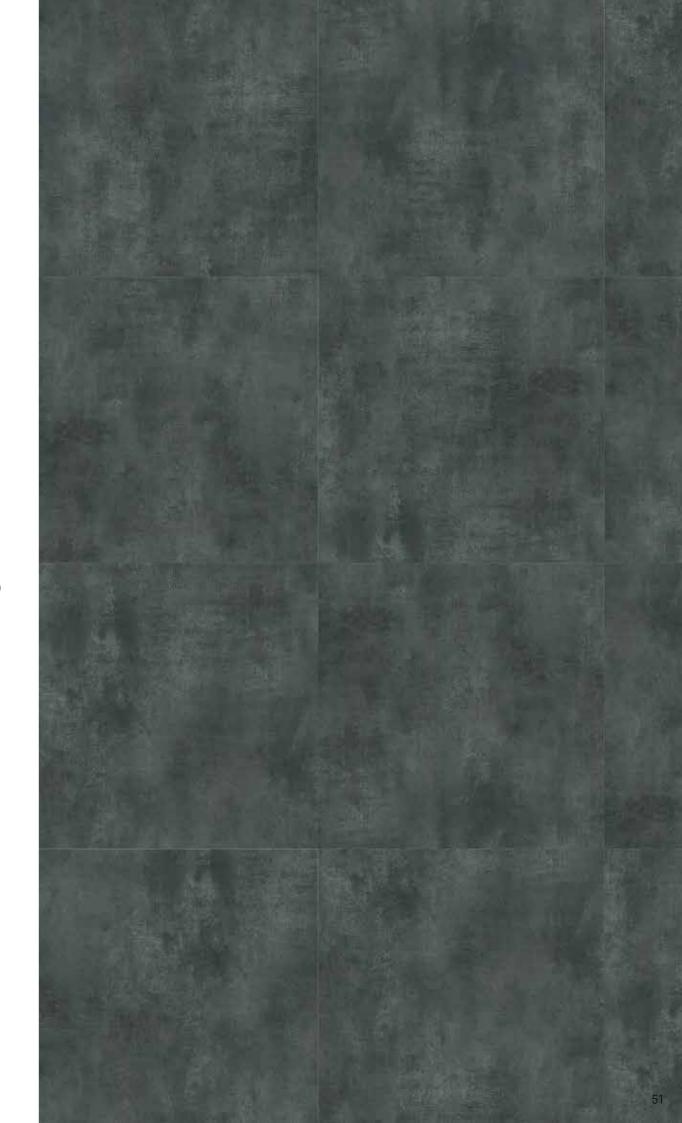


Graphite grey nuance

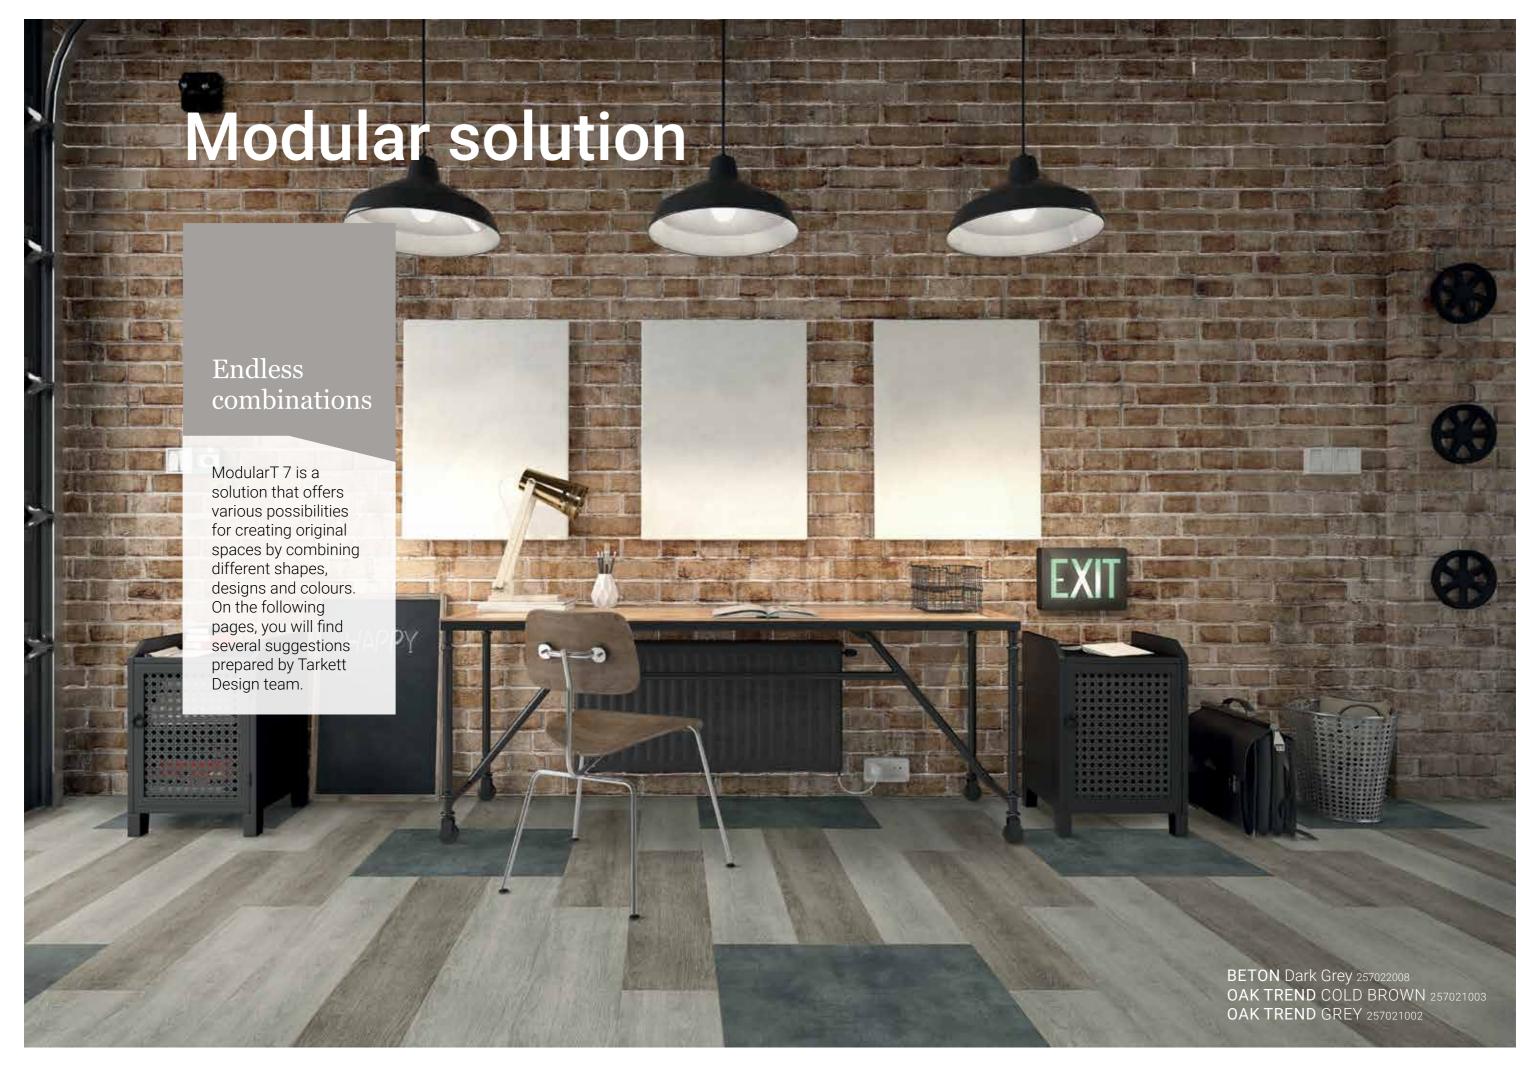

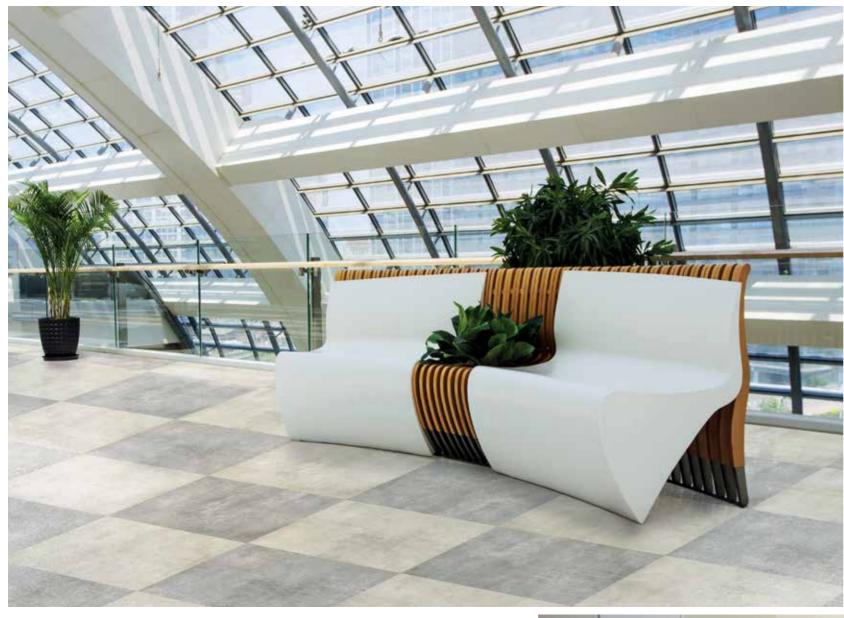












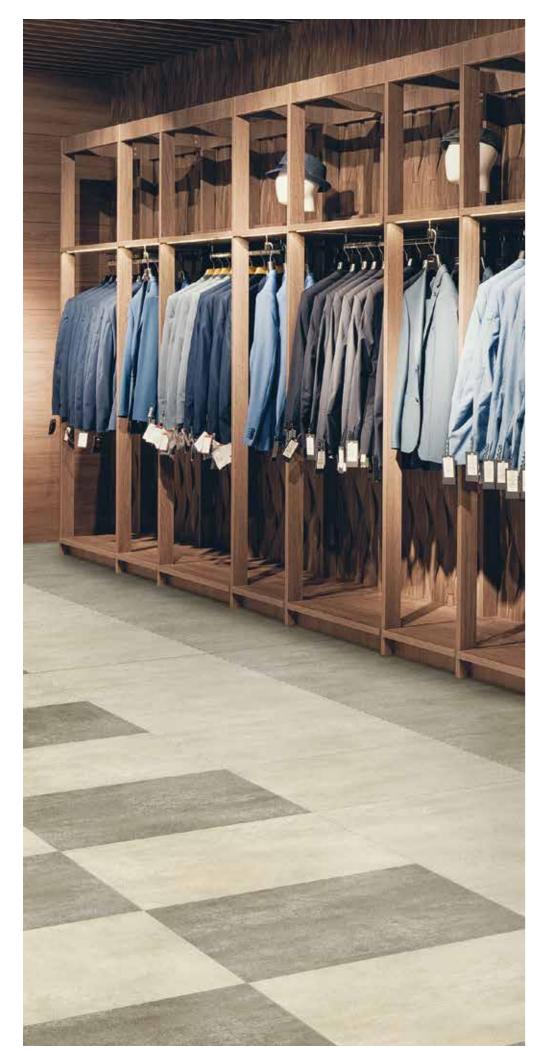











Installation instructions

IMPORTANT!

- The subfloor must be level, flat, clean, free from marks, sound, dry, solid, hard, smooth and not exposed to moisture.
- The preparation/dryness of the subfloor and installation procedures should all be in accordance with the current relevant standard within the country of use. Absorbency has to be regulated when needed and subfloor protected from humidity rising.
- Use the same shade number for each continuous surface.



- For wood pattern, avoid installation of LVT with the same design next to each other.
- Let the flooring acclimatise and relax at least 24h at room temperature (minimum 15°C or in accordance with current relevant country standard) before installation.
- Before starting to install, determine the type of laying taking into account the shape of the room and the design to be laid.
- The cut tiles closest to the walls should be more than 10 cm wide; at doorways and corners, not less than half a whole tile.

INSTALLATION:

- Tiles should be laid in a checkerboard pattern and installation should start from the center of the room, taking into consideration the wet bonding method when necessary.
- Stagger each row of planks to ensure that the end joints do not coincide with the previous row installed.
- Use only adhesives recommended by Tarkett (list available on our website). Always follow the adhesive manufacturer's instructions.
- Apply about 250 g/m² using the recommended trowel (TKB A1 or A2 according adhesive specification) and recommended open time.
- The flooring should be pressed immediately with a cork press and rolled in both directions with a heavy roller after complete installation.
- Wait 48h before allowing any foot traffic and 72h for moving of furniture.

TECHNICAL DATA

CERTIFICATION AND CLASSIFICATIO	N STANDARD	ModularT 7
Type of flooring	ISO (EN) 10582	Compact resilient floor covering
CE certification	EN 14041	YES
Classification ISO 1087	74 (EN 685)	Residential: 23 Commercial: 34 Industrial: 43
TECHNICAL CHARACTERISTICS	STANDARD	ModularT 7
Total thickness	ISO 24346 (EN 428)	2,5 mm
Wear layer thickness	ISO 24340 (EN 429)	0,7 mm
Bevelled edges		YES
Total weight	ISO 23997 (EN 430)	3200 g/m²
Abrasion (wear layer binder content)	ISO 10582	Туре І
Form of delivery	ISO 24342 (EN 427)	20 cm, 18 planks/box = 4,32m² , 60 boxes/pallet: 259,2r cm, 12 tiles/box = 4,32m², 60 boxes/pallet: 259,2m²
TECHNICAL PERFORMANCES	STANDARD	ModularT 7
Dimensional stability	ISO 23999 (EN 434) 『ドカ	≤ 0.10 %
Reaction to fire	EN 13501-1	Bfls1 on concrete substrate
Residual indentation	ISO 24343-1(EN 433)	≤ 0,10 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 2 mm
Thermal resistance	ISO (EN) 12524	0,02 - 0,03 m² K/W
Acoustic insulation	ISO (EN) 717/2	6 dB
Walking noise	NF S 31- 074	L n,e,w = 76 dB
Light fastness	ISO (EN) 105-B02	7/8
Slip resistance	EN 13893 DIN 51130	$\mu \ge 0.3$ R9/R10 depending on embossing type
Electrical properties	EN 1815 EN 1081	≤ 2 kV ≤ 1*10° Ohm





2701-0060-DoP-2019-12

























for other countries see www.tarkett.com