

iD INSPIRATION 40



White Oak - Light, Grey



Antik Oak



English Oak



Modern Oak



White Oak



TECHNICAL DATA	STANDARDS	iD Inspiration 40
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product
Classification	ISO 10874 (EN 685) residential commercial industrial	Classes: 23 32 41
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.20mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.40mm
Total weight	EN ISO 23997 (EN 430)	3 700g/m ²
PU treatment	—	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔL _w = 3dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _{fl} -s1 glued over wood and concrete substrates
Slip resistance	DIN 51130 EN 13893	R9/R10 depending on embossing μ ≥ 0.30
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Antik Oak



24260 136

iD INSPIRATION 40 Woods

Main Product Features

- Very resistant product with 0.40mm transparent wear-layer
- TopClean XP™ surface protection for great resistance and easy cleaning
- Made in Germany
- VOC emissions below quantifiable level (< 10µg/m³)

Surface Treatment



Sustainability Tag



Logistics Information

Available in planks



Laying direction:



General Information




iD INSPIRATION 40




Soft Walnut - Red Brown
Modern Oak - Beige

Rustic Oak

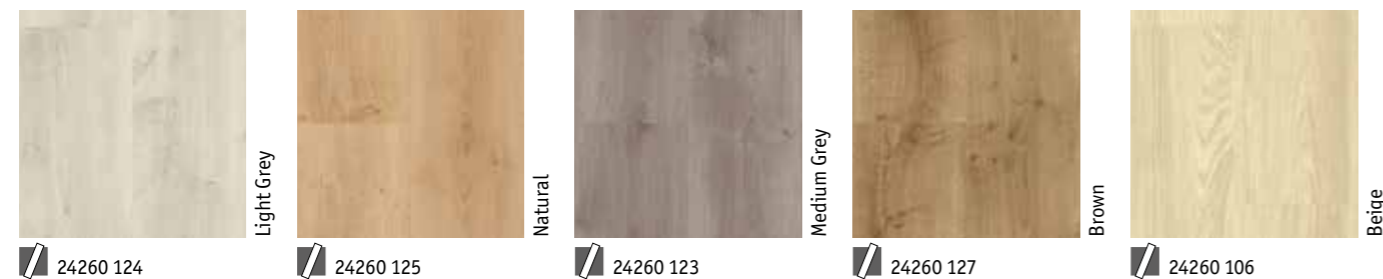

Patina Ash

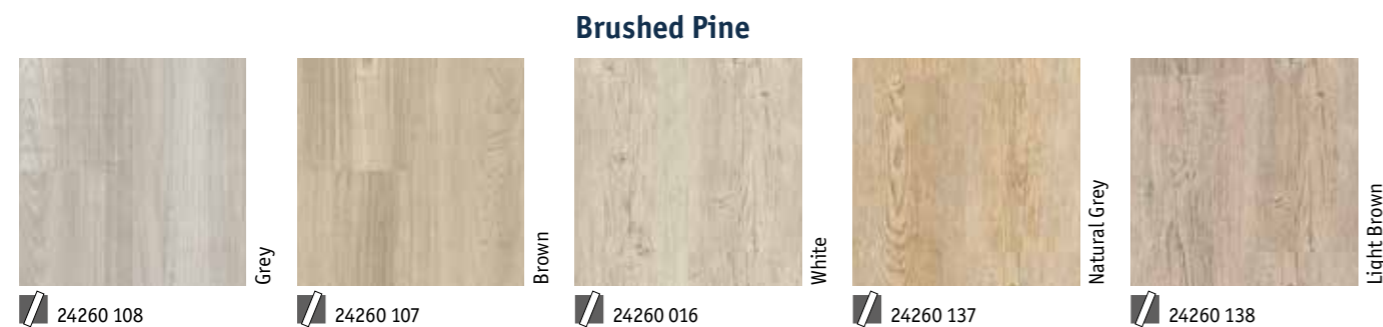

Brushed Pine



TECHNICAL DATA	STANDARDS	iD Inspiration 40
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product
Classification	ISO 10874 (EN 685) residential commercial industrial	Classes: 23 32 41
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.20mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.40mm
Total weight	EN ISO 23997 (EN 430)	3 700g/m ²
PU treatment	—	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔL _w = 3dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _{fl} -s1 glued over wood and concrete substrates
Slip resistance	DIN 51130 EN 13893	R9/R10 depending on embossing μ ≥ 0.30
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Maple



24261 143

iD INSPIRATION 40 Woods

Main Product Features

- Very resistant product with 0.40mm transparent wear-layer
- TopClean XP™ surface protection for great resistance and easy cleaning
- Made in Germany
- VOC emissions below quantifiable level (< 10µg/m³)

Surface Treatment




Sustainability Tag



Logistics Information

Available in planks



Laying direction:



General Information



Manufactured by Tarkett Holding GmbH
54329 Konz - Germany

According to European
Classification ISO 10874 (EN 685)

iD INSPIRATION 40



Rock - Grey



Polished Concrete



Light Grey

24262 075



Medium Grey


24262 076



Dark Grey

24262 077

Rock



Natural Grey

24262 147



Grey

24262 066

TECHNICAL DATA	STANDARDS	iD Inspiration 40
Classification		
Type of floor covering	EN ISO 10582 (EN 649)	Modular heterogeneous product
Classification	ISO 10874 (EN 685) residential commercial industrial	Classes: 23 32 41
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.20mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.40mm
Total weight	EN ISO 23997 (EN 430)	3 700g/m ²
PU treatment	—	TopClean XP™
Wear layer binder content	ISO 10582	Type I
Technical performance		
Impact sound reduction Acoustic improvement	EN ISO 717/2 NF S31-074	ΔL _w = 3dB Class C (L _{n,e,w} < 85dB)
Residual indentation	Average measured value	0.05mm
	EN ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	B _{fl} -s1 glued over wood and concrete substrates
Slip resistance	DIN 51130 EN 13893	R9/R10 depending on embossing μ ≥ 0.30
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2.00mm
Electrostatic properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ Ohms
Chemical resistance	EN ISO 26987 (EN 423)	Not affected (0)
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable - max. 27°C
Light fastness	EN ISO 105-B02	≥ 6

The above information is subject to modifications for the benefit of further improvement (02/2017).
For more detailed technical information, please contact Tarkett.

Vintage Zinc



Alu

24263 150

iD INSPIRATION 40

Authentic stones & Material effects

Main Product Features

- Very resistant product with 0.40mm transparent wear-layer
- TopClean XP™ surface protection for great resistance and easy cleaning
- Made in Germany
- VOC emissions below quantifiable level (< 10µg/m³)

Surface Treatment



Sustainability Tag




Logistics Information

Available in planks



Laying direction:



General Information



According to European
Classification ISO 10874 (EN 685)